F70/F35 Series


FERROUS CUTTING SAW BLADES

APPLICATIONS


- F70 for ferrous sawing of rail, billets, and bars.
- · F35 for ferrous cutting of plate steel.

TECHNICAL INFORMATION

- Effective negative hook angle on the cutting edge strengthens the carbide and helps direct chip flow.
- Special tooth design breaks up the chip and stabilizes the blade in the cut.

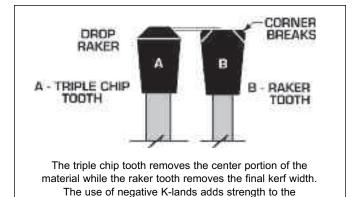



cutting edge and protects it from damage.



ADVANTAGES

- · Carbide fully supported to minimize breakage.
- · Rapid, aggressive cutting.
- · Available in English and Metric sizes.
- · Laser cut saw plate.
- · High nickel steel body to resist cracking.

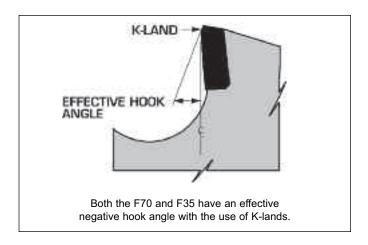



F70/F35 Series

FERROUS CUTTING SAW BLADES

BLADE DIAMETER	NUMBER OF TEETH	LIGHT up to .134 Plate	MEDIUM .135180 Plate	HEAVY .181200 Plate
10"	60			
10"	70			
10"	80			
10"	90			
10"	100			
12"	60			
12"	70			
12"	80			
12"	90			
12"	100			
14"	60			
14"	70			
14"	80			
14"	90			
14"	100			
16"	60	PRICING DUE TO PLA	WILL VARY TE THICKNE	-eS.
16"	70	ຸນຕິ	MILLAICKN	
16"	80	PRICING	TETT	
16"	90	DUETOFF		
16"	100	00		
18"	60			
18"	70			
18"	80			
18"	90			
18"	100			
20"	60			
20"	70			
20"	80			
20"	90			
20"	100			
20"	120			
22" 22"	60 70			
22"	70 80			
22"	90			
22"	100			
22"	120			
	120			

BLADE	NUMBER	LIGHT up to .180	MEDIUM .180200	HEAVY .201259
DIAMETER	OF TEETH	Plate	Plate	.201259 Plate
24"	60			
24"	70			
24"	80			
24"	90			
24"	100			
24"	120			
26"	60			
26"	70			
26"	80			
26"	90			
26"	100			
26"	120			
28"	60			
28"	70			
28"	80			
28"	90		JARY	<u>.</u> S.
28"	100	۷۵۷	NILL VICKNE	50
28"	120	PRICING	VILL VARY TE THICKNE	
30"	60	PRICING V		
30"	70	Uo.		
30"	80			
30"	90			
30"	100			
30"	120			
32"	60			
32"	70			
32"	80			
32"	90			
32"	100			
32" 34"	120			
	60 70			
34" 34"	80			
34"	90			
34"	100			
34"	120			
36"	60			
36"	70			
36"	80			
36"	90			
36"	100			
36"	120			
-	-			

NOTE:

- $\bullet\,$ Saws over 36" diameter must be quoted through customer service.
- Saws outside the plate thickness must be quoted through customer service.