

A15E Series

NON-FERROUS CUTTING SAW BLADES

APPLICATIONS


- Use when cutting thin walled non-ferrous extrusions and tubing where the wall thickness is .080" to .250" thick.
- Designed for use where close tolerances are required on the material.
- Designed for machines that have clamping mechanisms to hold the material to be cut.

TECHNICAL INFORMATION


- 0° hook angle.
- Modified alternate top bevel with corner breaks.
- Corner breaks allow the saw to handle more aggressive cutting.

ADVANTAGES


- Produces excellent finishes on the end of the material.
- Reduces or eliminates burrs on the material.
- Laser cut saw plate.
- Eliminates de-burring operations on the part.

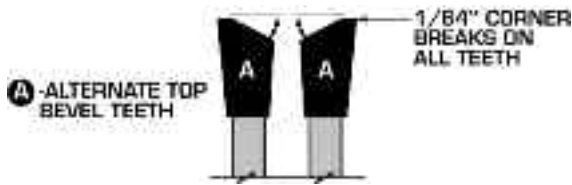

The modification of corner breaks on the alternate top bevel teeth reduces the vulnerability of the carbide therefore allowing the A15E to handle more abusive applications.

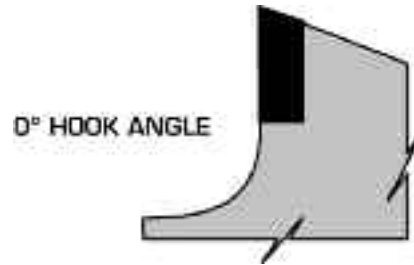

0° hook angle is standard on the A15E style saw blade.



Straight faced, no face shear.

A15E Series

NON-FERROUS CUTTING SAW BLADES

BLADE DIAMETER	NUMBER OF TEETH	LIGHT up to .134 Plate	MEDIUM .135-.180 Plate	HEAVY .181-.200 Plate	BLADE DIAMETER	NUMBER OF TEETH	LIGHT up to .180 Plate	MEDIUM .180-.200 Plate	HEAVY .201-.259 Plate
10"	60				24"	80			
10"	70				24"	90			
10"	80				24"	100			
10"	90				24"	120			
10"	100				24"	140			
12"	60				24"	160			
12"	70				26"	80			
12"	80				26"	90			
12"	90				26"	100			
12"	100				26"	120			
14"	60				26"	140			
14"	70				26"	160			
14"	80				28"	80			
14"	90				28"	90			
14"	100				28"	100			
16"	60				28"	120			
16"	70				28"	140			
16"	80				28"	160			
16"	90				30"	80			
16"	100				30"	90			
18"	60				30"	100			
18"	70				30"	120			
18"	80				30"	140			
18"	90				30"	160			
18"	100				32"	80			
20"	60				32"	90			
20"	70				32"	100			
20"	80				32"	120			
20"	90				32"	140			
20"	100				32"	160			
20"	120				34"	80			
22"	80				34"	90			
22"	90				34"	100			
22"	100				34"	120			
22"	120				34"	140			
22"	140				34"	160			
22"	160				36"	80			
					36"	90			
					36"	100			
					36"	120			
					36"	140			
					36"	160			

PRICING WILL VARY
DUE TO PLATE THICKNESS.

PRICING WILL VARY
DUE TO PLATE THICKNESS.

NOTE:

- Saws over 36" diameter must be quoted through customer service.
- Saws outside the plate thickness must be quoted through customer service.

STANDARD SAW BLADES

DISPOSABLE SAW BLADES

CUSTOM SAW BLADES

COLD SAW BLADES

INDEX